


User's Manual for
Curtain Controller

Caution:
Curtain Controller should not be
installed in humid environment

- i) Press the “on” key of Curtain Controller until the LED light is on
- ii) Press any number key on the Remote Controller
- iii) If the LED light on the turn-on key glitters twice, it means check code is successful. If the LED light on the turn-on key glitters four times, it means check code is failed. If the LED light on the turn-on key glitters once slowly, it means the turn-on key has checked code with four number keys (full). If the user wants to use the turn-on key to check the code with other number key, please delete any number key that saved:
 - a. Press the turn-on key until the LED light is on.
 - b. Press any number key of the four checked code number keys.
 - c. If the LED light on the turn-on key glitters four times, it means operation is successful.
 - iv) Turn-off key's check code is same as turn-on key


Product Illustration & Cabling

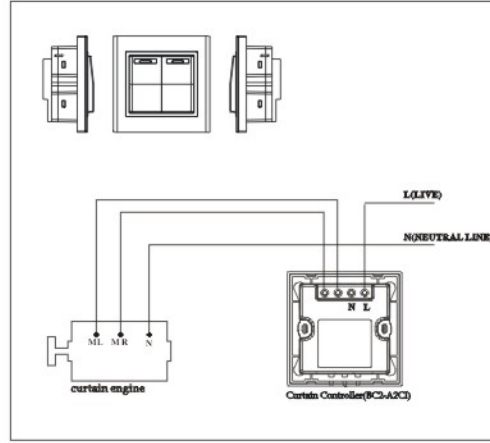

- c) Turn on the curtain: press the turn-on number key on Remote Controller, the curtain will turn on automatically. Press the turn-on number key again, the curtain will stop. Turn off the curtain: press the turn-off number key on the remote controller; the curtain will turn off automatically. Press the turn-off number key again, the curtain will stop.
- d) Delete the checked code: press the turn-on key until the LED light is on & off. (If the LED light on the turn-off key on once, the LED light on. All the checked code will be deleted.)

3) Control by Remote Controller(BC2--GGLR)
Please refer to user's manual for Remote Controller.

Installation

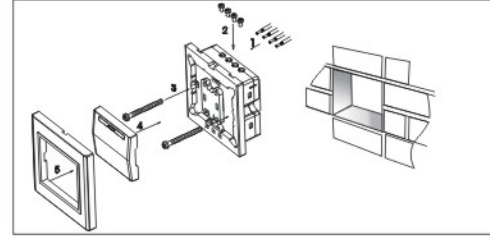

Instruction

1) Manual Control

4) Curtain Controller can be controlled through telephone or mobile.

Specification

| | |
|-----------------------|------------|
| Working voltage | AC180~250V |
| Rating power | ≤1100W |
| Working temperature | 0~50℃ |
| Working humidity | ≤90%RH |
| Receiving sensitivity | -90dBm |
| Frequency | 433.92MHz |

- a) Turn on the curtain: Press “on” key; the curtain will turn on automatically. Press “on” again to stop.
- b) Turn off the curtain: Press “off” key, the curtain will turn off automatically. Press “off” to stop.

2) Control by Scene Remote Controller (BC2-GSSR)

Use Remote Controller to check code with Curtain Controller.

Important:

- a) The “on” key of Curtain Controller can check code with at most four number keys of Remote Controller.
- b) The “on” key and “off” key can't check code with the same number key

Caution:

- 1) Make sure products are installed by professional electrician. Please turn off all power supply before installation.
- 2) DO NOT be installed in bathroom.
- 3) Please check whether there is short circuit before installation.
- 4) The load power must not exceed the rating power.